



**Centering ring with  
screen, stainless steel,  
FKM, DN 160 ISO-K**

---



**PFEIFFER**

# Centering ring with screen

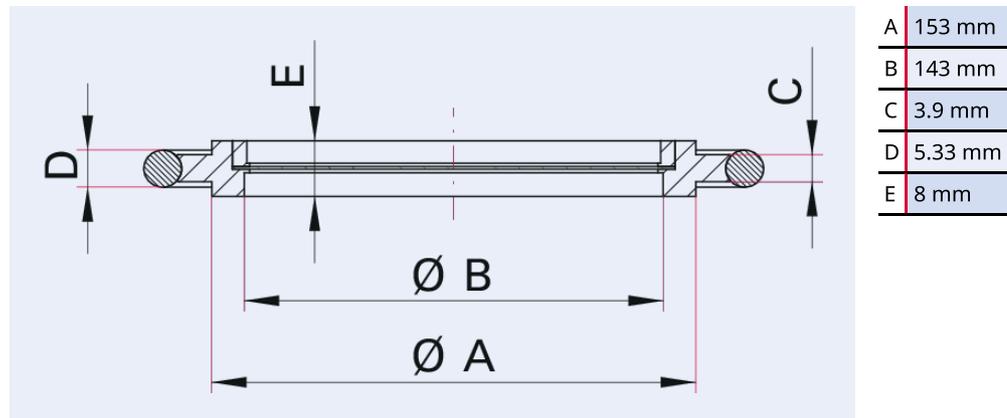


Illustration only

## Centering ring with screen, stainless steel, FKM, DN 160 ISO-K

- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

### Dimensions



### Technical Data

#### Centering ring with screen, stainless steel, FKM, DN 160 ISO-K

Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Temperature range	15 – 150 °C
Wire thickness	0.2 mm   0.01 inch
Connection flange	DN 160 ISO-K
Temperature range max.	150 °C   302 °F   423.15 K
Temperature range min.	15 °C   5 °F   258.15 K

<b>Order number</b>	Centering ring with screen, stainless steel, FKM, DN 160 ISO-K
Centering ring with screen, stainless steel, FKM, DN 160 ISO-K	322ZRD160



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 