



**Bellows, stainless steel:
flange 304; bellows
1.4571, DN 160 ISO-K**

PFEIFFER 

Spring bellows

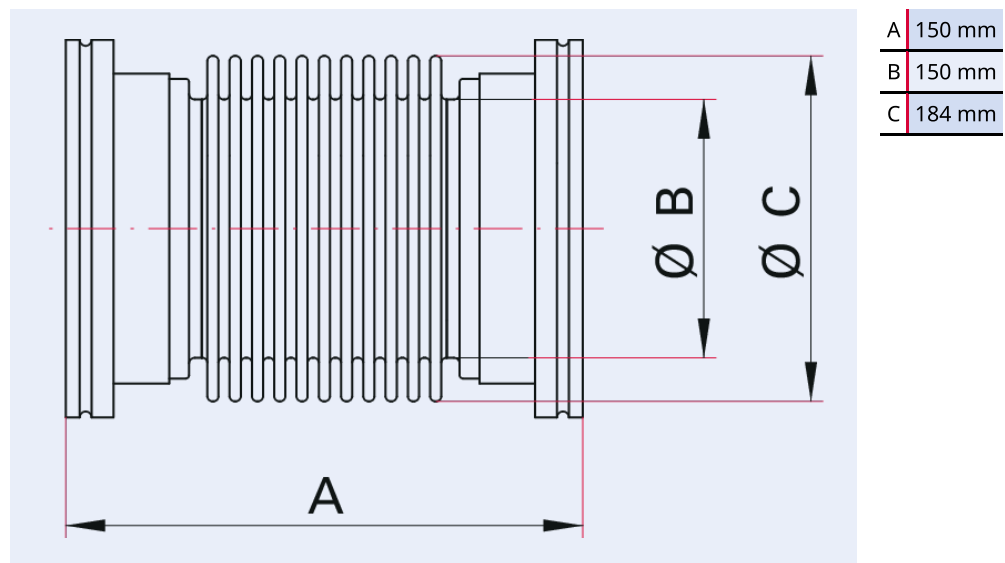


Illustration only

Bellows, stainless steel: flange 304; bellows 1.4571, DN 160 ISO-K

- Flange connection length: 30 mm
- Custom lengths on request

Dimensions



Technical Data	Bellows, stainless steel: flange 304; bellows 1.4571, DN 160 ISO-K
Temperature range	196 – 300 °C
Axial stroke	±14 mm ±0.55 inch
Tightness	1 · 10 ⁻¹¹ Pa m ³ /s 7.5 · 10 ⁻¹¹ Torr l/s 1 · 10 ⁻¹⁰ mbar l/s
Connection flange	DN 160 ISO-K
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 5 · 10 ² hPa over pressure (metal seal)
Material	Stainless steel (flange: 304; bellows: DN 63 to DN 100 and DN 320: 316L; DN 160 to DN 250: 1.4571)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Bellows, stainless steel: flange 304; bellows 1.4571, DN 160 ISO-K
Bellows, stainless steel: flange 304; bellows 1.4571, DN 160 ISO-K	320SFK160-150



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 