



**Centering ring with
outer ring, aluminum,
NBR, DN 100 ISO-K**



PFEIFFER 

Centering ring with outer ring

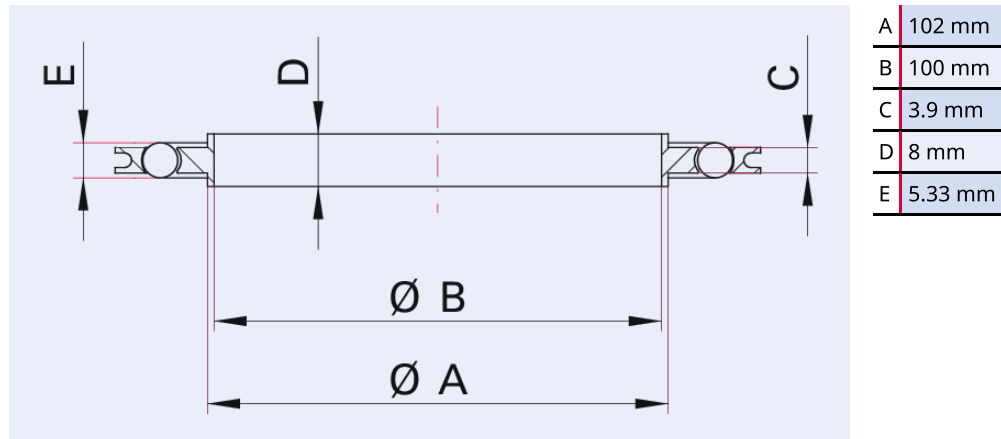


Illustration only

Centering ring with outer ring, aluminum, NBR, DN 100 ISO-K

- Aluminum outer ring
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data

Technical Data	Centering ring with outer ring, aluminum, NBR, DN 100 ISO-K
Materials in contact with media	Aluminum
O-ring material	NBR
Temperature range	25 - 120 °C
Connection flange	DN 100 ISO-K
Temperature range max.	120 °C 248 °F 393.15 K
Temperature range min.	25 °C 13 °F 248.15 K

Order number	Centering ring with outer ring, aluminum, NBR, DN 100 ISO-K
Centering ring with outer ring, aluminum, NBR, DN 100 ISO-K	311ZRA100



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 