



**Quick-Access door, with
sight glass, stainless
steel 304/1.4301,
DN 160 ISO-F**

PFEIFFER 

Quick-Access door, with sight glass

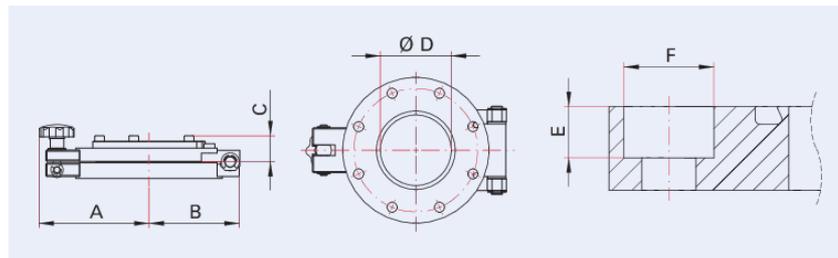


Illustration only

Quick-Access door, with sight glass, stainless steel 304/1.4301, DN 160 ISO-F

- Screw holes: Through-holes with counter-bore for cylinder head
- Can be installed using hexagon socket screws

Dimensions



A	147 mm
B	130 mm
C	31 mm
D	145 mm
E	12.5 mm
F	20 mm
G	16 mm

Technical Data	Quick-Access door, with sight glass, stainless steel 304/1.4301, DN 160 ISO-F
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Number of screws	8 Pieces
Seal	FKM
O-ring material	FKM
Temperature range	15 – 150 °C
Sight glass	Borosilicate glass
Connection flange	DN 160 ISO-F
Pressure range	1 · 10 ⁻⁸ hPa – to ambient pressure
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Quick-Access door, with sight glass, stainless steel 304/1.4301, DN 160 ISO-F
Quick-Access door, with sight glass, stainless steel 304/1.4301, DN 160 ISO-F	520KTU160-G



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 