



**Corrugated hose,  
highly flexible, thin-  
wall; stainless steel,  
DN 40 ISO-KF, length  
250 mm**

---



**PFEIFFER** 

# Corrugated hose, highly flexible

PFEIFFER 

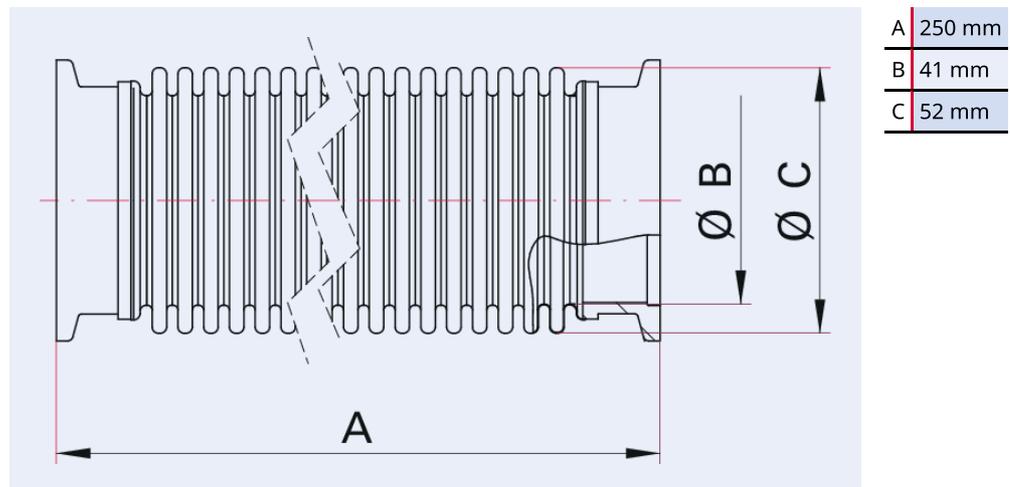


Illustration only

**Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 250 mm**

- Flange connection length 15 mm
- Custom lengths on request

## Dimensions



<b>Technical Data</b>	<b>Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 250 mm</b>
Materials in contact with media	Bellows: 316L   Flange: Stainless steel 1.4301/304
Temperature range	196 – 300 °C
Bending radius, frequent movement	180 mm   7.09 inch
Bending radius, one-time movement	59 mm   2.32 inch
Connection flange	DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Material	Flange: stainless steel 1.4301/304; bellows: stainless steel 316L
Temperature range max.	300 °C   572 °F   573.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 250 mm</b>
Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 250 mm	120SWD040-0250



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
T +49 551 99963-0  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 