



Ball valve, manually actuated, stainless steel, DN 16 ISO-KF



PFEIFFER 

Ball valve

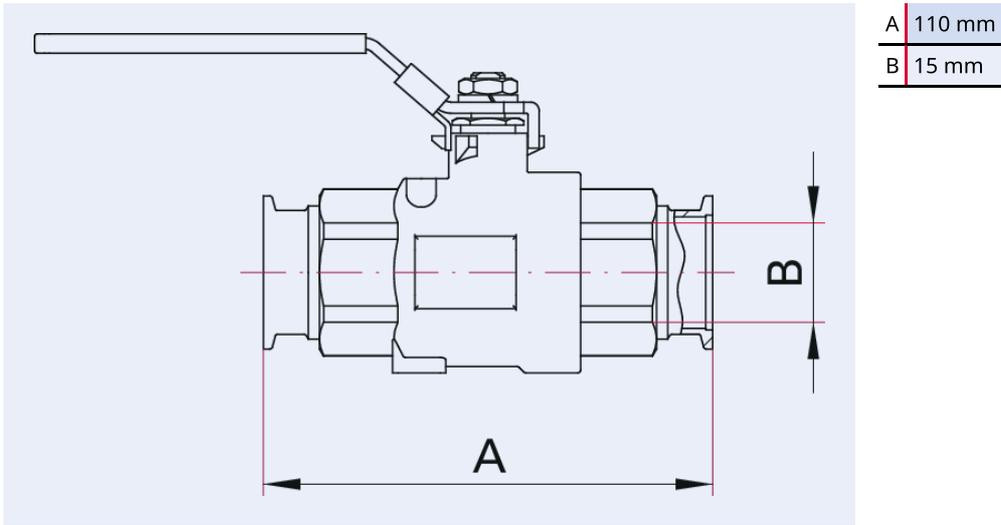


Illustration only

Ball valve, manually actuated, stainless steel, DN 16 ISO-KF

- Ball valve with large-scale free clearance
- Ball made from stainless steel (1.4401)

Dimensions



Technical Data	Ball valve, manually actuated, stainless steel, DN 16 ISO-KF
Flange, material	Stainless steel 1.4301 (AISI 304)
Seal	PTFE PTFE (glass fiber reinforced)
Type	Ball valve
Temperature range	20 – 80 °C
Housing	Stainless steel 1.4408
Actuator	90° rotation of hand lever
Tightness	$<1 \cdot 10^{-7}$ Pa m ³ /s $<7.5 \cdot 10^{-7}$ Torr l/s $<1 \cdot 10^{-6}$ mbar l/s
Weight approx.	0.41 kg 0.9 lb
Connection flange	DN 16 ISO-KF
Pressure range	$1 \cdot 10^{-5}$ hPa – $5 \cdot 10^2$ hPa over pressure
Temperature range max.	80 °C 176 °F 353.15 K
Temperature range min.	20 °C 4 °F 253.15 K

Order number	Ball valve, manually actuated, stainless steel, DN 16 ISO-KF
Ball valve, manually actuated, stainless steel, DN 16 ISO-KF	120VKZ016



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 