

**Bracket screw,  
aluminum EN AW-6061;  
crew: stainless steel A2-  
70, DN 160-250 ISO-K**

---

**PFEIFFER** 

# Bracket screw

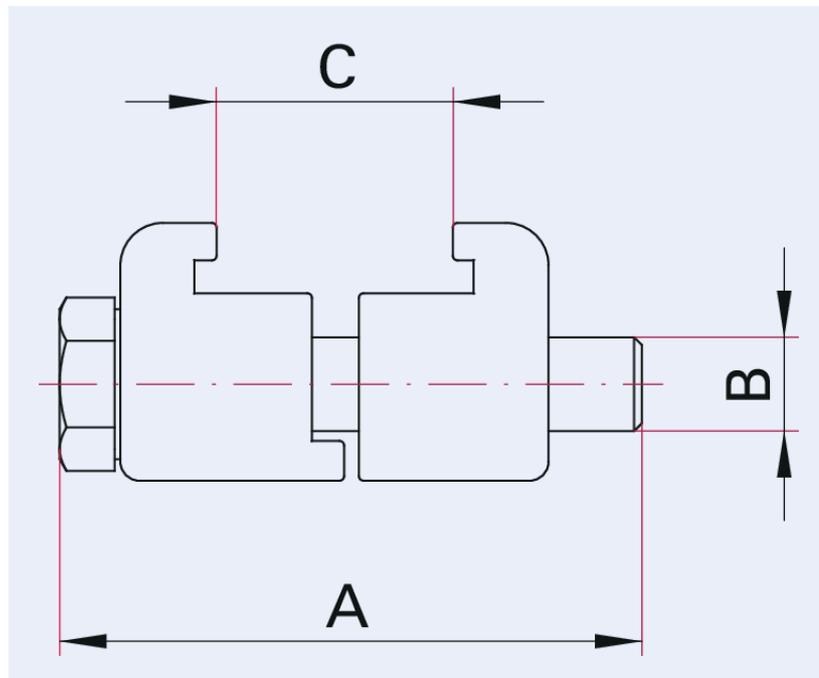


Illustration only

**Bracket screw, aluminum EN AW-6061; crew: stainless steel A2-70, DN 160-250 ISO-K**

- Suitable for use with elastomer seals
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

## Dimensions



A	52 mm
B	M10
C	27 - 32 mm

<b>Technical Data</b>	<b>Bracket screw, aluminum EN AW-6061; crew: stainless steel A2-70, DN 160-250 ISO-K</b>
Temperature range	196 – 200 °C
Connection flange	DN 160 – DN 250 ISO-K
Material	Aluminum EN AW-6061; screw: stainless steel A2-70
Temperature range max.	200 °C   392 °F   473.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>Bracket screw, aluminum EN AW-6061; crew: stainless steel A2-70, DN 160-250 ISO-K</b>
Bracket screw, aluminum EN AW-6061; crew: stainless steel A2-70, DN 160-250 ISO-K	310BKL250



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 