



**Corrugated hose,  
flexible, stainless steel,  
DN 16 ISO-KF, length  
1000 mm**

---



**PFEIFFER** 

# Corrugated hose

PFEIFFER 

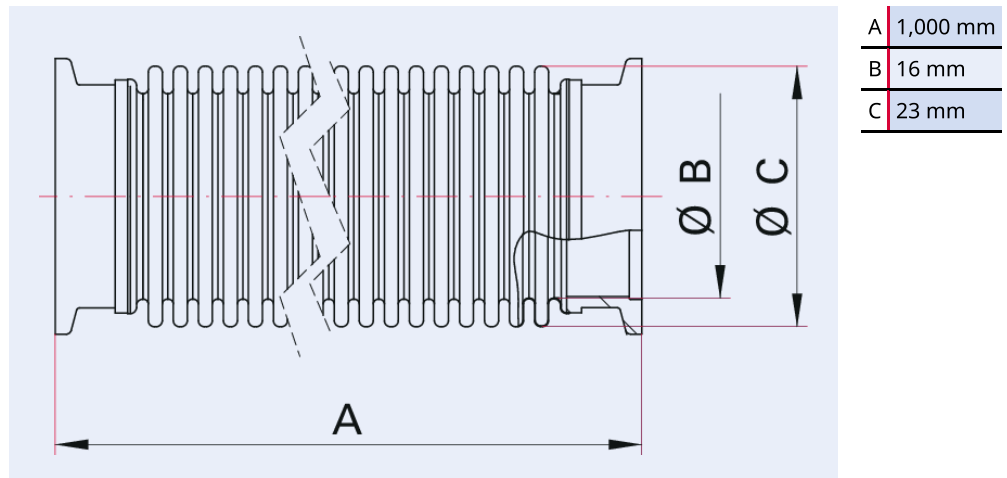


Illustration only

**Corrugated hose, flexible, stainless steel, DN 16 ISO-KF, length 1000 mm**

- Flange connection length 15 mm
- Custom lengths on request

## Dimensions



| <b>Technical Data</b>             | <b>Corrugated hose, flexible, stainless steel,<br/>DN 16 ISO-KF, length 1000 mm</b> |
|-----------------------------------|---|
| Materials in contact with media   | Bellows: 316L  <br>Flange: Stainless steel 1.4301/304                               |
| Temperature range                 | 196 – 300 °C  |
| Bending radius, frequent movement | 140 mm   5.51 inch  |
| Bending radius, one-time movement | 26 mm   1.02 inch   |
| Connection flange                 | DN 16 ISO-KF  |
| Pressure range                    | $1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure                            |
| Material                          | Flange: stainless steel 1.4301/304; bellows:<br>stainless steel 316L                |
| Temperature range max.            | 300 °C   572 °F   573.15 K  |
| Temperature range min.            | 196 °C   320.8 °F   77.15 K   |

| <b>Order number</b>   | <b>Corrugated hose, flexible, stainless steel,<br/>DN 16 ISO-KF, length 1000 mm</b> |
|---|---|
| Corrugated hose, flexible, stainless steel,<br>DN 16 ISO-KF, length 1000 mm | 120SWN016-1000  |



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 