

**Conical adapter,
aluminum EN AW-6082,
DN 63 ISO-K/40 KF**



Conical adapter





Illustration only

Conical adapter, aluminum EN AW-6082, DN 63 ISO-K/40 KF

- Available in stainless steel or aluminum

Dimensions

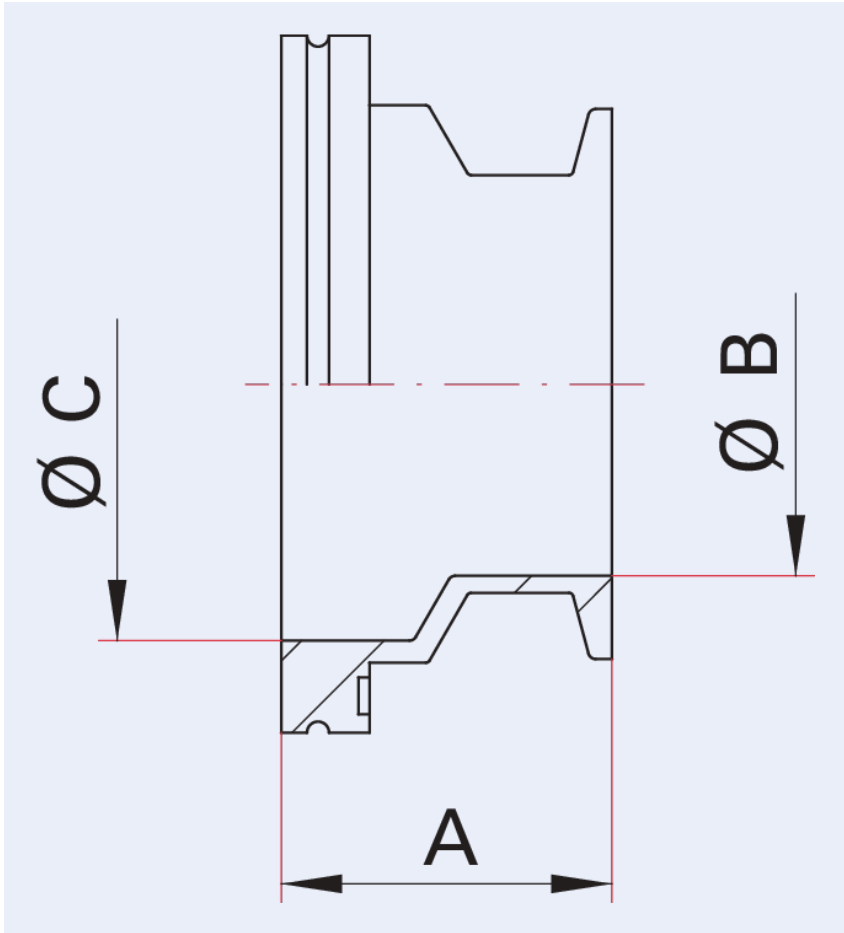

A	40 mm
B	40.5 mm
C	70 mm

Technical Data	Conical adapter, aluminum EN AW-6082, DN 63 ISO-K/40 KF
Materials in contact with media	Aluminum EN AW-6082
Nominal diameter reduced	DN 40 ISO-KF
Temperature range	196 – 150 °C
Connection flange	DN 63 ISO-K / DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Conical adapter, aluminum EN AW-6082, DN 63 ISO-K/40 KF
Conical adapter, aluminum EN AW-6082, DN 63 ISO-K/40 KF	310RRK063-040-40



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 