



PFEIFFER 

Clamping ring

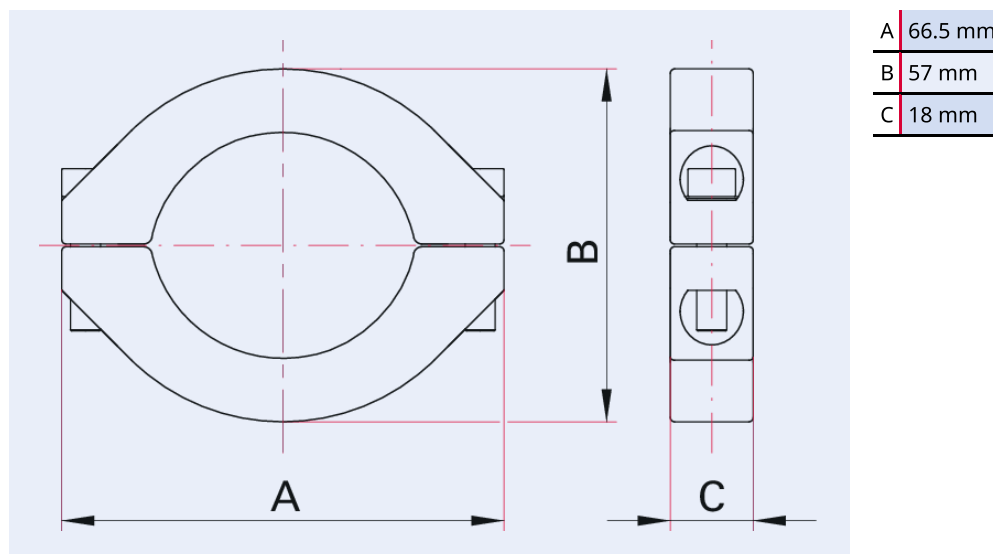


Illustration only

Clamping ring for metal seals, stainless steel 304/1.4301, DN 20-25 ISO-KF

- Suitable for use with metal and elastomer seals
- Screws: Hexagon socket, A2-70
- We recommend using a screw thread lubricant
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data	Clamping ring for metal seals, stainless steel 304/1.4301, DN 20-25 ISO-KF
Over pressure max.	500 hPa
Screw	M5 x 25
Temperature range	196 – 300 °C
Overpressure max.	500 hPa 375 Torr 500 mbar
Connection flange	DN 20 – DN 25 ISO-KF
Material	Stainless steel 1.4301/304
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Clamping ring for metal seals, stainless steel 304/1.4301, DN 20-25 ISO-KF
Clamping ring for metal seals, stainless steel 304/1.4301, DN 20-25 ISO-KF	120BSM025-A

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 