



**Screw-in flange with
seal, stainless steel
304/1.4301, DN 63 ISO-
K, G2"**



PFEIFFER 

Flange with pipe thread and seal

PFEIFFER 

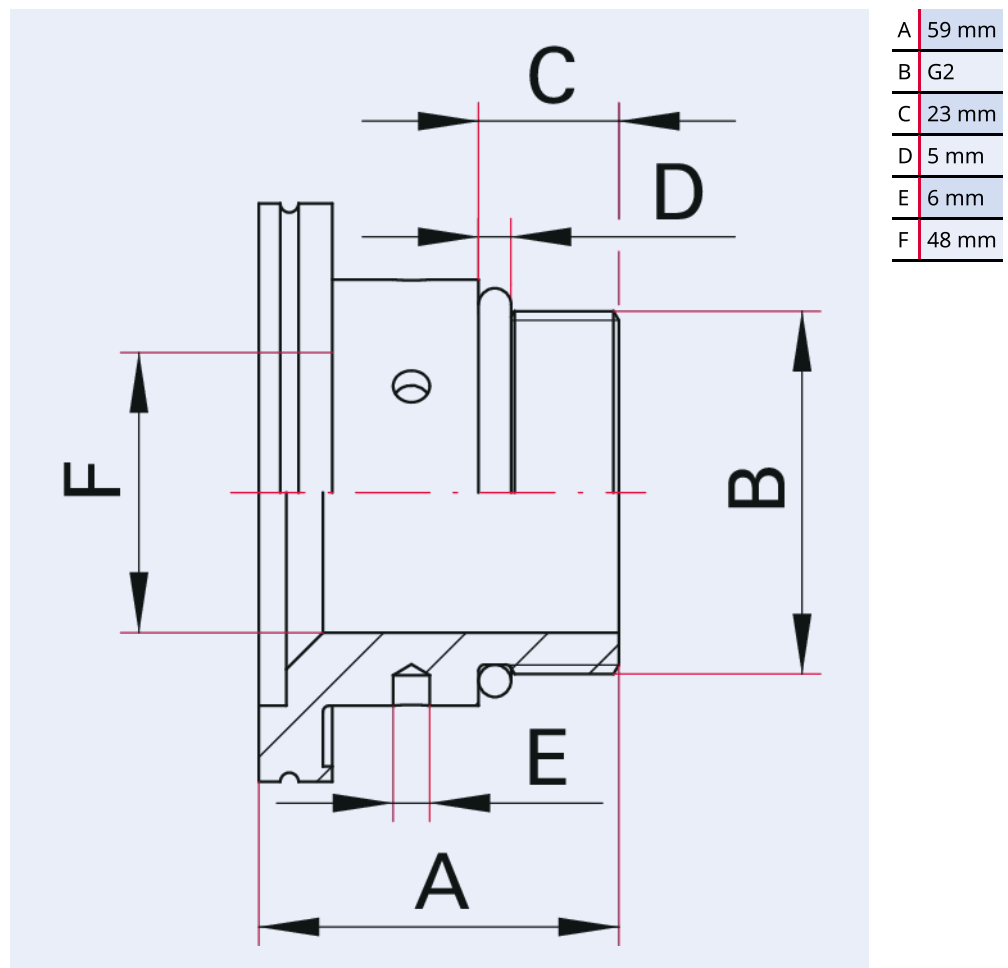


Illustration only

Screw-in flange with seal, stainless steel 304/1.4301, DN 63 ISO-K, G2"

- FKM O-ring included

Dimensions



Technical Data	Screw-in flange with seal, stainless steel 304/1.4301, DN 63 ISO-K, G2"
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
O-ring material	FKM
Holes	(blind holes) for C-spanner wrench: 6 x Ø 6 mm
Temperature range	15 – 200 °C
Connection flange	DN 63 ISO-K
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Screw-in flange with seal, stainless steel 304/1.4301, DN 63 ISO-K, G2"
Screw-in flange with seal, stainless steel 304/1.4301, DN 63 ISO-K, G2"	320AED063-2000



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 