



**Corrugated hose,  
flexible, stainless steel,  
DN 16 CF, length 250  
mm**

---



**PFEIFFER** 

# Corrugated hose

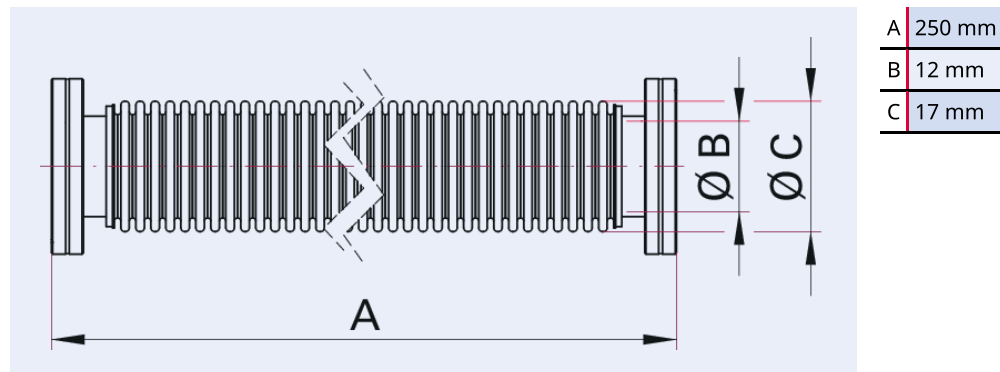


Illustration only

## Corrugated hose, flexible, stainless steel, DN 16 CF, length 250 mm

- One flange rotatable
- Custom lengths on request

## Dimensions



## Technical Data

### Corrugated hose, flexible, stainless steel, DN 16 CF, length 250 mm

|                                   |   |
|-----------------------------------|---|
| Temperature range                 | 196 – 300 °C                                |
| Bending radius, frequent movement | 140 mm   5.51 inch                          |
| Bending radius, one-time movement | 26 mm   1.02 inch                           |
| Connection flange                 | DN 16 CF                                    |
| Pressure range                    | $1 \cdot 10^{-9}$ hPa – to ambient pressure |
| Material                          | Stainless steel: Flange 304L, Bellows 316L  |
| Temperature range max.            | 300 °C   572 °F   573.15 K                  |
| Temperature range min.            | 196 °C   320.8 °F   77.15 K                 |

|  |  |
|--|--|
| <b>Order number</b>  | <b>Corrugated hose, flexible, stainless steel,<br/>DN 16 CF, length 250 mm</b> |
| Corrugated hose, flexible, stainless steel,<br>DN 16 CF, length 250 mm | 420SWN016-0250   |



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 