



**Corrugated hose,
highly flexible, thin-
wall; stainless steel,
DN 40 ISO-KF, length
1500 mm**



PFEIFFER 

Corrugated hose, highly flexible

PFEIFFER 

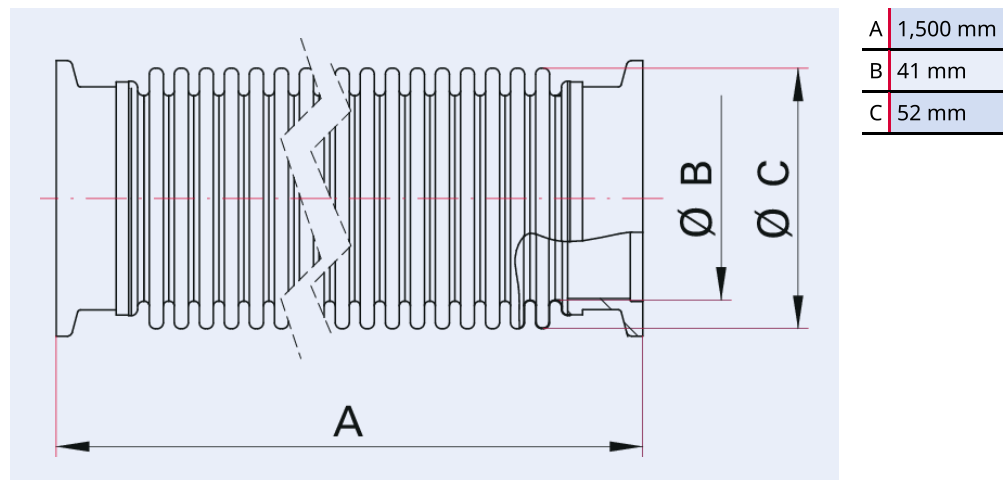


Illustration only

Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 1500 mm

- Flange connection length 15 mm
- Custom lengths on request

Dimensions



| Technical Data | Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 1500 mm |
|-----------------------------------|---|
| Materials in contact with media | Bellows: 316L Flange: Stainless steel 1.4301/304 |
| Temperature range | 196 – 300 °C |
| Bending radius, frequent movement | 180 mm 7.09 inch |
| Bending radius, one-time movement | 59 mm 2.32 inch |
| Connection flange | DN 40 ISO-KF |
| Pressure range | $1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure |
| Material | Flange: stainless steel 1.4301/304; bellows: stainless steel 316L |
| Temperature range max. | 300 °C 572 °F 573.15 K |
| Temperature range min. | 196 °C 320.8 °F 77.15 K |

| Order number | Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 1500 mm |
|--|---|
| Corrugated hose, highly flexible, thin-wall; stainless steel, DN 40 ISO-KF, length 1500 mm | 120SWD040-1500 |



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 