

**Corrugated hose,  
braided; stainless steel,  
DN 50 ISO-KF, length  
750 mm**

---

**PFEIFFER** 

# Corrugated hose, braided

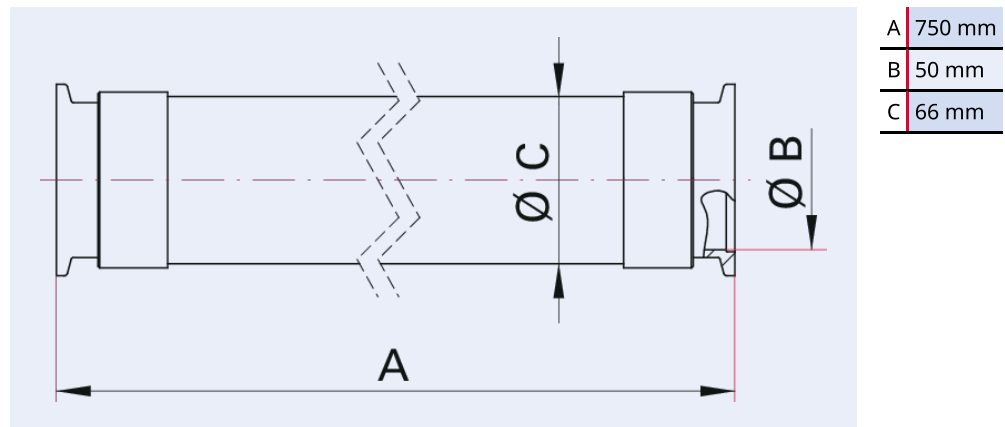


Illustration only

## Corrugated hose, braided; stainless steel, DN 50 ISO-KF, length 750 mm

- Custom lengths on request

### Dimensions



Technical Data	Corrugated hose, braided; stainless steel, DN 50 ISO-KF, length 750 mm
Temperature range	196 – 300 °C
Bending radius, frequent movement	280 mm   11.02 inch
Bending radius, one-time movement	120 mm   4.72 inch
Connection flange	DN 50 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Material	Stainless steel: Flange and braiding 1.4301/304; Bellows 316L
Temperature range max.	300 °C   572 °F   573.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>Corrugated hose, braided; stainless steel, DN 50 ISO-KF, length 750 mm</b>
Corrugated hose, braided; stainless steel, DN 50 ISO-KF, length 750 mm	120SWU050-0750



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
T +49 551 99963-0  
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 