

**Fluid feedthrough,  
double tube, stainless  
steel, DN 40 ISO-KF**

---



**PFEIFFER** 

# Fluid feedthrough, double tube

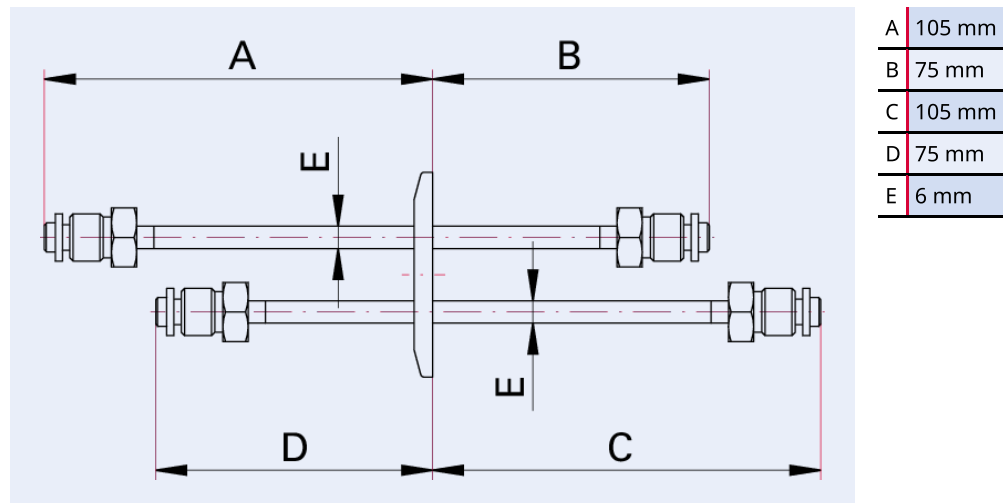


Illustration only

## Fluid feedthrough, double tube, stainless steel, DN 40 ISO-KF

- Flange material: Stainless steel
- V = VCR male 1/4"

## Dimensions



## Technical Data

## Fluid feedthrough, double tube, stainless steel, DN 40 ISO-KF

Materials in contact with media	Stainless steel
Temperature range (vacuum side)	196 – 300 °C
Vacuum side	V
Atmosphere side	V
Tightness	$1 \cdot 10^{-11}$ Pa m <sup>3</sup> /s   $7.5 \cdot 10^{-11}$ Torr l/s   $1 \cdot 10^{-10}$ mbar l/s
Connection flange	DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure

<b>Order number</b>	<b>Fluid feedthrough, double tube, stainless steel, DN 40 ISO-KF</b>
Fluid feedthrough, double tube, stainless steel, DN 40 ISO-KF	120XFL040-2-VV



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
T +49 551 99963-0  
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 