




**Half nipple, stainless
steel 1.4404/316L,
DN 25 ISO-KF**

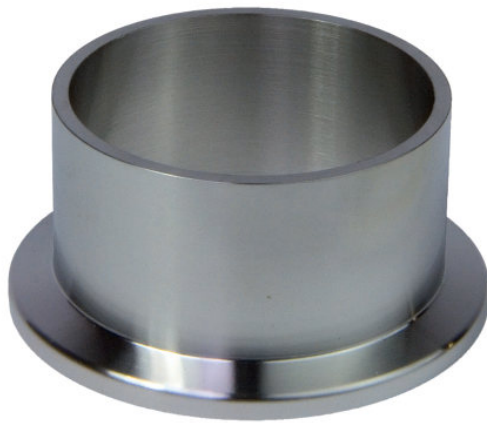

PFEIFFER 

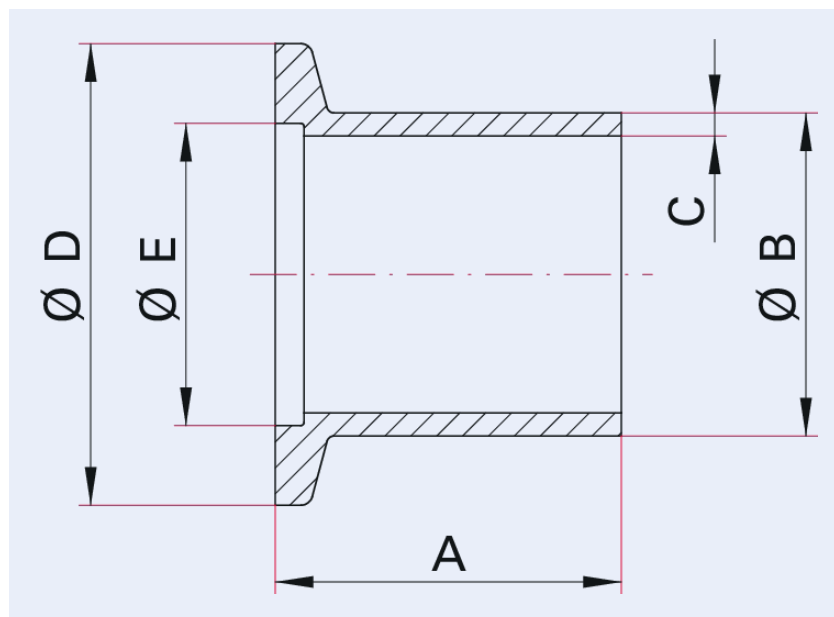


Illustration only

Half nipple, stainless steel 1.4404/316L, DN 25 ISO-KF

- Custom lengths on request

Dimensions



A	40 mm
B	25.4 mm
C	1.65 mm
D	40 mm
E	26.2 mm

Technical Data	Half nipple, stainless steel 1.4404/316L, DN 25 ISO-KF
Materials in contact with media	Stainless steel 1.4404 (AISI 316L)
Pipe dimension	25.4 mm × 1.65 mm
Temperature range	196 – 350 °C
Connection flange	DN 25 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (elastomer seal); $1 \cdot 10^{-9}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (metal seal)
Temperature range max.	350 °C 662 °F 623.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Half nipple, stainless steel 1.4404/316L, DN 25 ISO-KF
Half nipple, stainless steel 1.4404/316L, DN 25 ISO-KF	170FRA025-25-40

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 