



**Tube compression
fitting, stainless steel
304/1.4301, DN 40 ISO-
KF, 25 mm**



PFEIFFER 

Tube compression fitting

PFEIFFER 

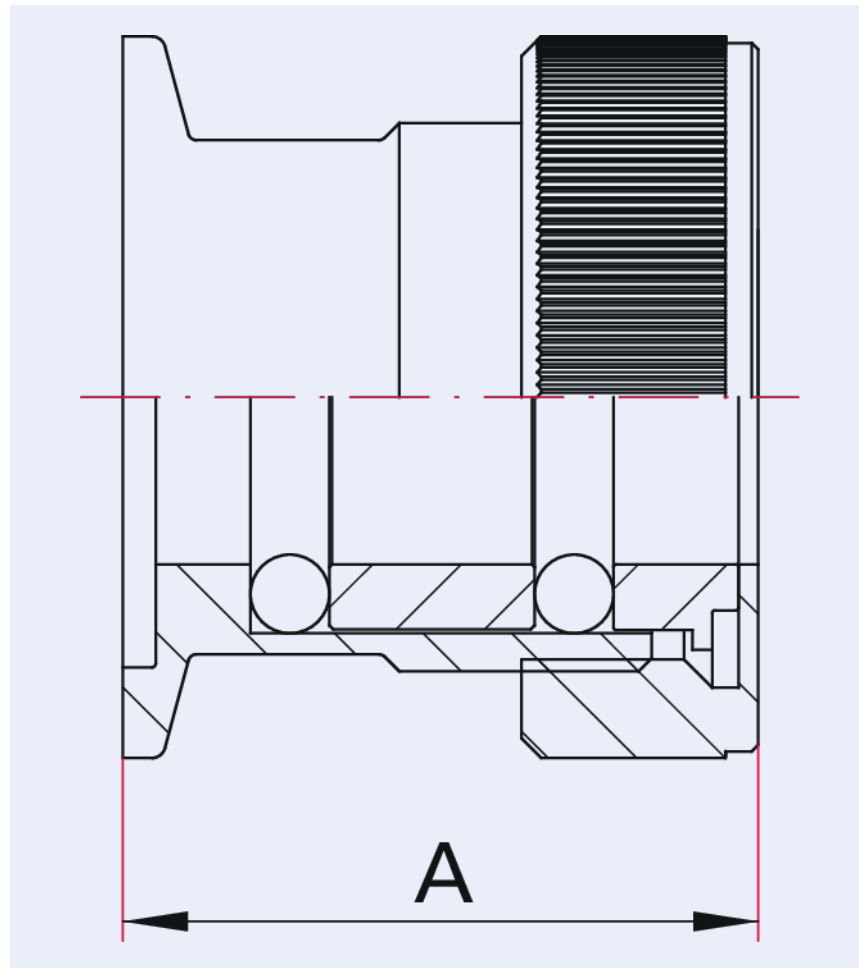


Illustration only

Tube compression fitting, stainless steel 304/1.4301, DN 40 ISO-KF, 25 mm

- Tube can be fed through
- Manual opening and closing
- Double-sealed with FKM O-rings

Dimensions



Technical Data

Tube compression fitting, stainless steel 304/1.4301, DN 40 ISO-KF, 25 mm

Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Tube diameter	25 mm
Pipe external diameter	25 mm
O-ring material	FKM
Temperature range	15 - 130 °C
Connection flange	DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-7}$ hPa - to ambient pressure
Temperature range max.	130 °C 266 °F 403.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Tube compression fitting, stainless steel 304/1.4301, DN 40 ISO-KF, 25 mm
Tube compression fitting, stainless steel 304/1.4301, DN 40 ISO-KF, 25 mm	120XQV040-25



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 