

**Blank flange, stainless  
steel 316L/1.4404,  
DN 40 ISO-KF**

---



**PFEIFFER** 

# Blank flange





Illustration only

## Blank flange, stainless steel 316L/1.4404, DN 40 ISO-KF

- Available in stainless steel or aluminum


### Dimensions

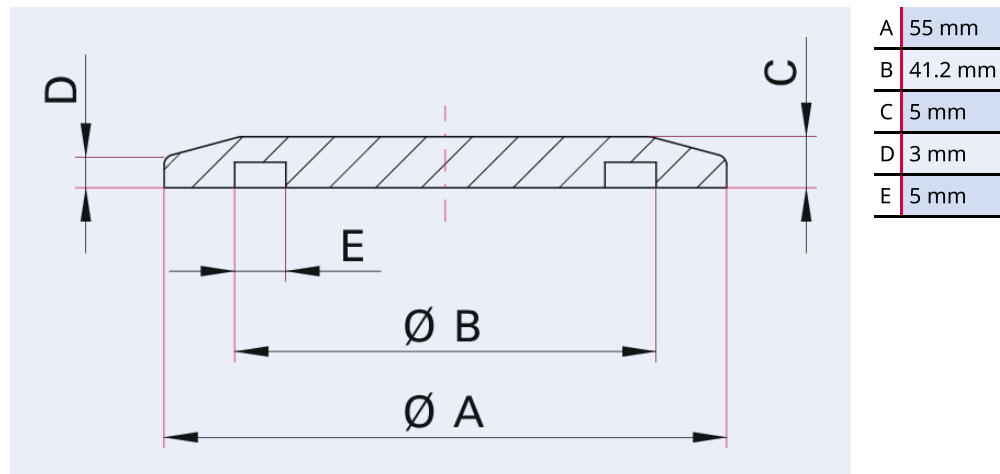

### Technical Data

Blank flange, stainless steel 316L/1.4404, DN 40 ISO-KF	
Materials in contact with media	Stainless steel 1.4404 (AISI 316L)
Temperature range	196 – 350 °C
Connection flange	DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (elastomer seal); $1 \cdot 10^{-9}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (metal seal)
Temperature range max.	350 °C   662 °F   623.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>Blank flange, stainless steel 316L/1.4404, DN 40 ISO-KF</b>
Blank flange, stainless steel 316L/1.4404, DN 40 ISO-KF	170FBL040

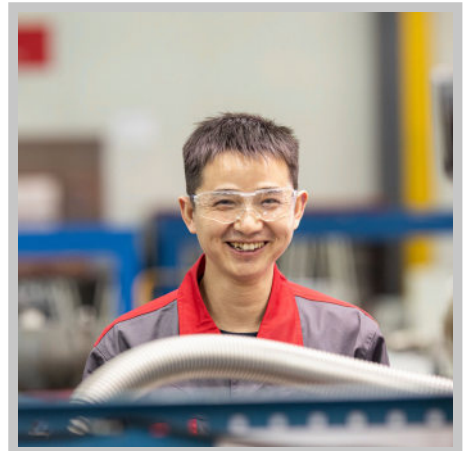

Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 