

**Blank flange, aluminum  
EN AW-6082/3.2315,  
DN 50 ISO-KF**

---



**PFEIFFER**

# Blank flange





Illustration only

## Blank flange, aluminum EN AW-6082/3.2315, DN 50 ISO-KF

- Available in stainless steel or aluminum

### Dimensions

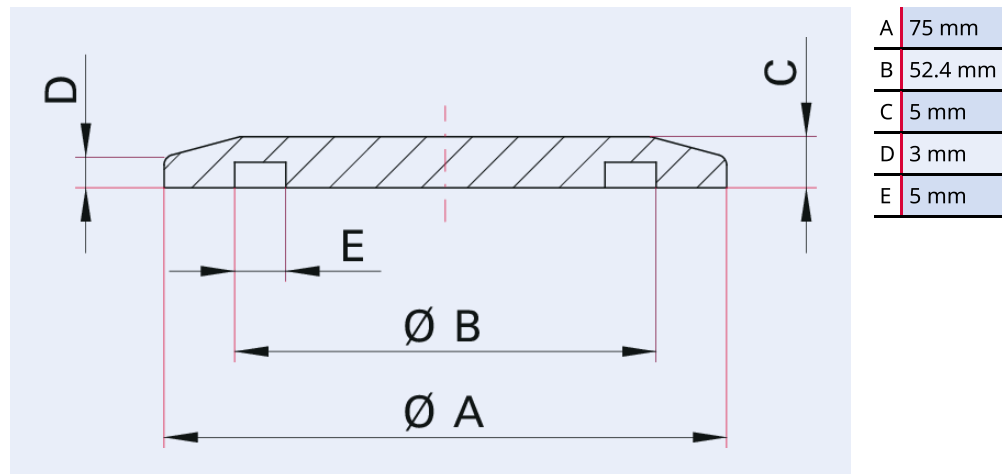

### Technical Data

#### Blank flange, aluminum EN AW-6082/3.2315, DN 50 ISO-KF

Materials in contact with media	Aluminum 3.2315/EN AW-6082
Temperature range	196 - 200 °C
Connection flange	DN 50 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa - $1.5 \cdot 10^3$ hPa over pressure
Temperature range max.	200 °C   392 °F   473.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>Blank flange, aluminum EN AW-6082/3.2315, DN 50 ISO-KF</b>
Blank flange, aluminum EN AW-6082/3.2315, DN 50 ISO-KF	110FBL050



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 