

**Blank flange, stainless
steel 304/1.4301,
DN 50 ISO-KF**



PFEIFFER 

Blank flange





Illustration only

Blank flange, stainless steel 304/1.4301, DN 50 ISO-KF

- Available in stainless steel or aluminum

Dimensions

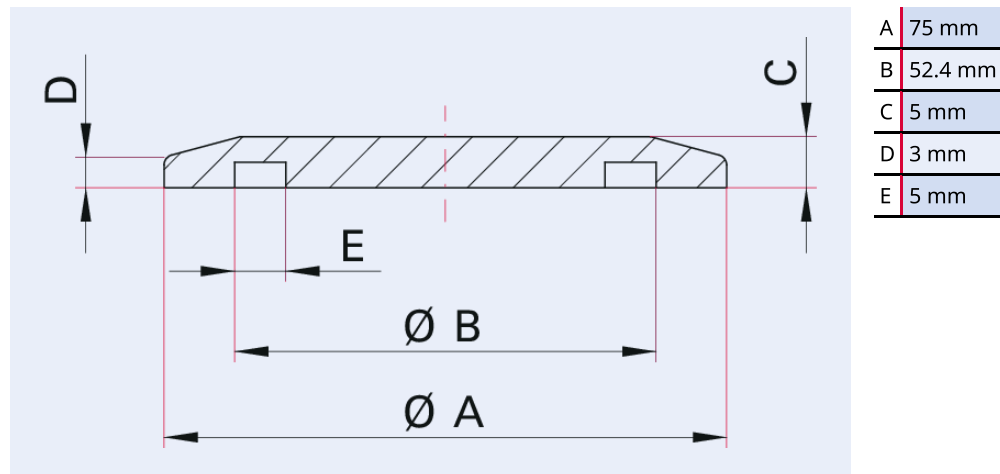

Technical Data

Blank flange, stainless steel 304/1.4301, DN 50 ISO-KF

Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Temperature range	196 – 300 °C
Connection flange	DN 50 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (elastomer seal); $1 \cdot 10^{-9}$ hPa – $1.5 \cdot 10^3$ hPa over pressure (metal seal)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Blank flange, stainless steel 304/1.4301, DN 50 ISO-KF
Blank flange, stainless steel 304/1.4301, DN 50 ISO-KF	120FBL050



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 