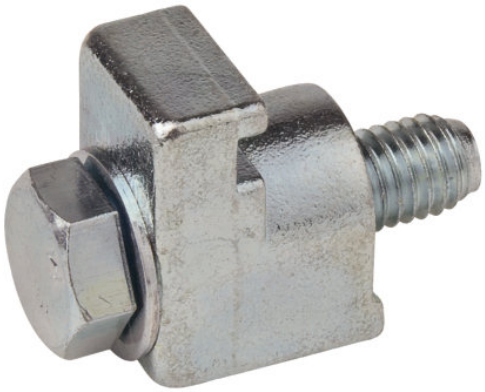

Claw clamp for base plate with sealing groove, zinc-plated steel, DN 630 ISO-K

PFEIFFER

Claw clamp

PFEIFFER



Illustration only

Claw clamp for base plate with sealing groove, zinc-plated steel, DN 630 ISO-K

- Suitable for use with metal and elastomer seals
- For installing an ISO-K flange on a base plate with O-ring groove
- If there is no O-ring groove, please use the longer single claw clamps (BPR)
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions

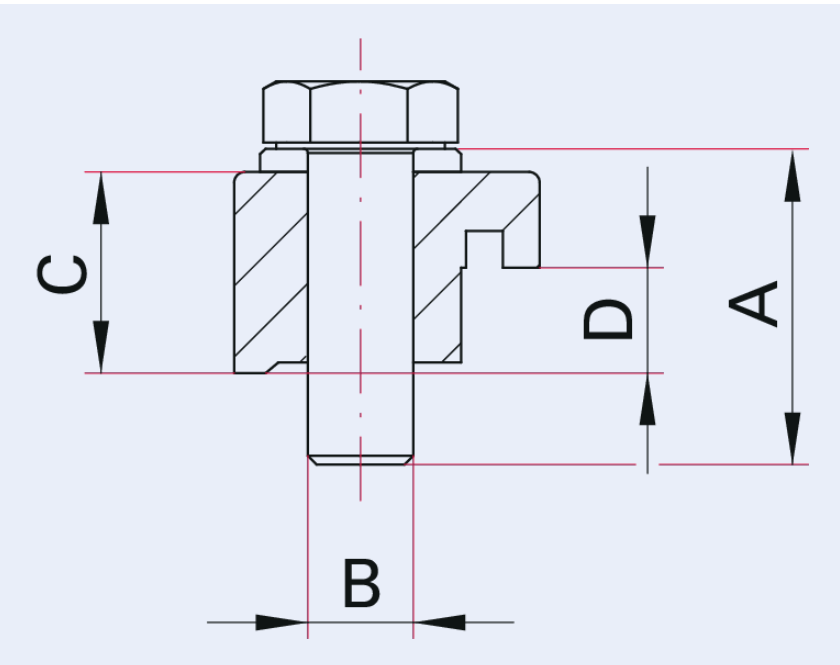

A	55 mm
B	M12
C	36 mm
D	20.4 mm

Technical Data	Claw clamp for base plate with sealing groove, zinc-plated steel, DN 630 ISO-K
Temperature range	0 – 200 °C
Connection flange	DN 630 ISO-K
Material	Zinc-plated steel
Temperature range max.	200 °C | 392 °F | 473.15 K
Temperature range min.	0 °C | 32 °F | 273.15 K

Order number	Claw clamp for base plate with sealing groove, zinc-plated steel, DN 630 ISO-K
Claw clamp for base plate with sealing groove, zinc-plated steel, DN 630 ISO-K	350BPD630

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:

https://webportal.pfeiffer-vacuum.com/global/en/contact

Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum

www.pfeiffer-vacuum.com

PFEIFFER