



**VCR-adapter, male,  
stainless steel,  
DN 40 ISO-KF**

---



# VCR adapter, male

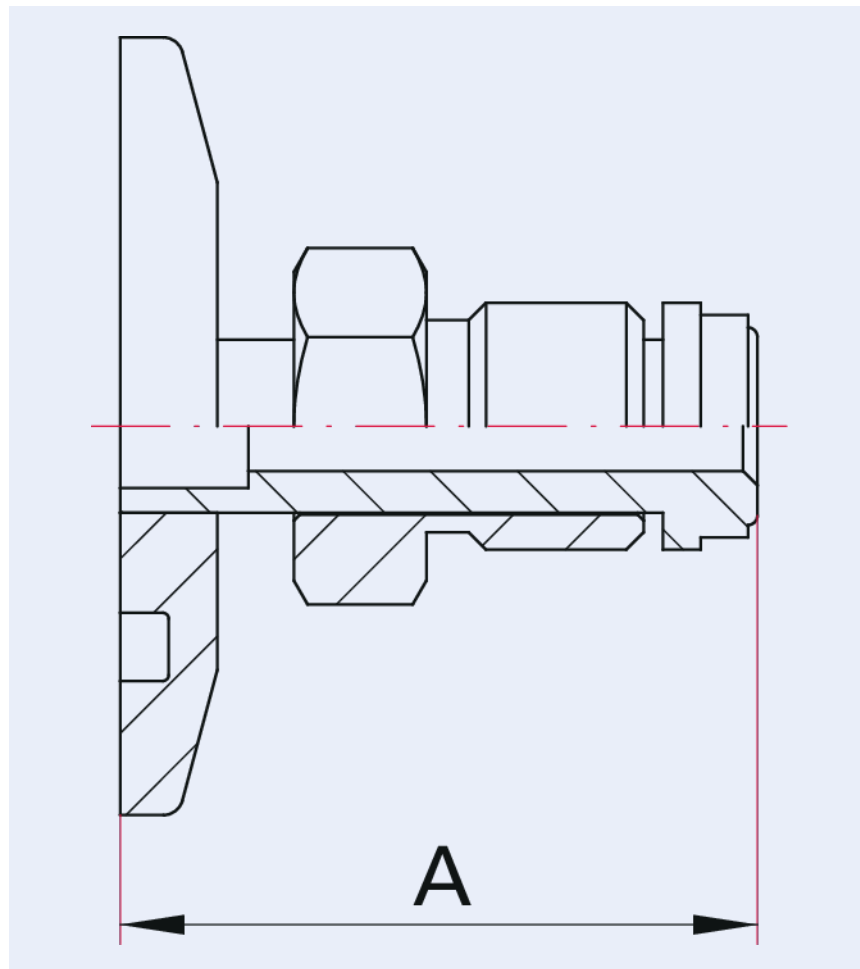


Illustration only

**VCR-adapter, male, stainless steel, DN 40 ISO-KF**

- Original Swagelok® VCR Adapter

## Dimensions



A | 37 mm

<b>Technical Data</b>	<b>VCR-adapter, male, stainless steel, DN 40 ISO-KF</b>
Materials in contact with media	Stainless steel 1.4301 (AISI 304)   Stainless steel 1.4401 (AISI 316)
VCR connection	1/2"
Temperature range	196 – 300 °C
Connection flange	DN 40 ISO-KF / G 1/2" VCR
Pressure range	1 · 10 <sup>-8</sup> hPa – 5 · 10 <sup>2</sup> hPa over pressure (elastomer seal); 1 · 10 <sup>-9</sup> hPa – 5 · 10 <sup>2</sup> hPa over pressure (metal seal)
Temperature range max.	300 °C   572 °F   573.15 K
Temperature range min.	196 °C   320.8 °F   77.15 K

<b>Order number</b>	<b>VCR-adapter, male, stainless steel, DN 40 ISO-KF</b>
VCR-adapter, male, stainless steel, DN 40 ISO-KF	120AVM040-0500



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

**Pfeiffer Vacuum Components & Solutions GmbH Germany**

**T +49 551 99963-0**

**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 