

Fluid feedthrough, double tube, stainless steel, DN 40 CF



PFEIFFER 

Fluid feedthrough, single tube

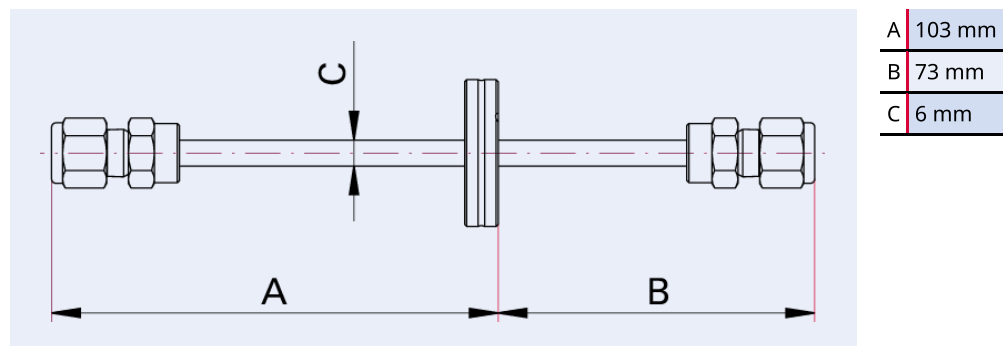


Illustration only

Fluid feedthrough, double tube, stainless steel, DN 40 CF

- Flange material: Stainless steel
- S = Swagelok® fitting 6 mm

Dimensions



Technical Data	Fluid feedthrough, double tube, stainless steel, DN 40 CF
Materials in contact with media	Stainless steel
Temperature range (vacuum side)	196 – 300 °C
Vacuum side	S
Atmosphere side	S
Tightness	$1 \cdot 10^{-11}$ Pa m ³ /s $7.5 \cdot 10^{-11}$ Torr l/s $1 \cdot 10^{-10}$ mbar l/s
Connection flange	DN 40 CF
Pressure range	$1 \cdot 10^{-11}$ hPa – to ambient pressure

Order number	Fluid feedthrough, double tube, stainless steel, DN 40 CF
Fluid feedthrough, double tube, stainless steel, DN 40 CF	420XFL040-SS



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 